
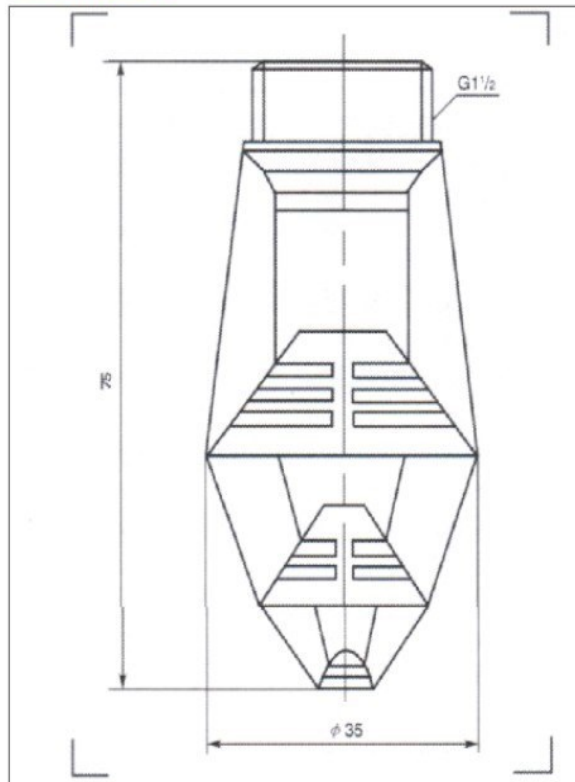


## LQT wide angle full cone nozzles

### DESIGN FEATURES

The nozzle is installed on the pipe-rack of cooling tower or wash-over string vertically for cooling dedusting . Under the rate working pressure , the flow rate and the spray angle are stable ,which has the good functions of preventing blocking up and anticorrosion and can reduce or avoid repair ,so the service life is long . The nozzle meets user's requirements for flow under the service pressure in the manner of replacing inner regulating ring.

### DIMENSIONS:

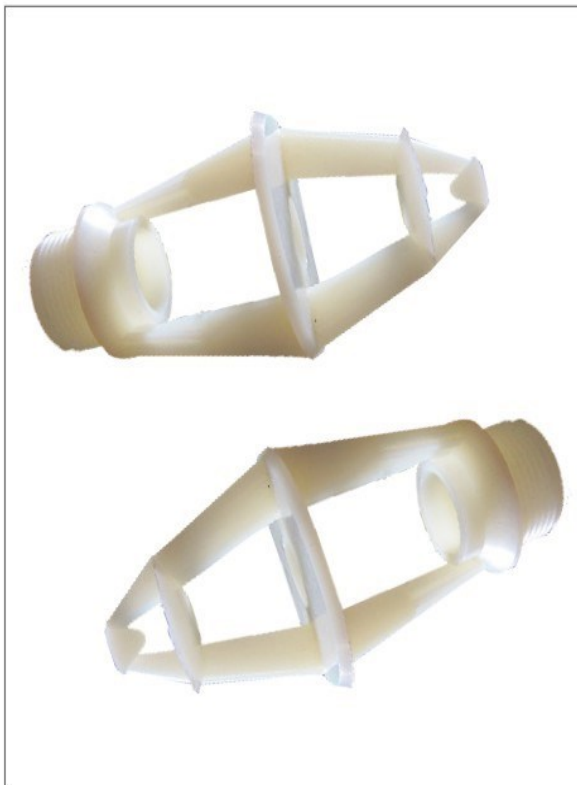

### PERFORMANCE DATA

Pressure (bar )	0.5bar	1bar	2bar	3bar
Flow rate (l/min)	70-360	110-500	145-700	180-860
Spray angle	95°-110°	100°-115°	110°-120°	110°-120°

Note:If users have special requirements for the performance parameters,structure and size ,please contact us . We would be able to design and manufacture according to the special demand .